


NOBEL METAL THERMOCOUPLES

Nobel Metal Thermocouple & Ceramic Protection Tube Assembly

Model Code: **T4**

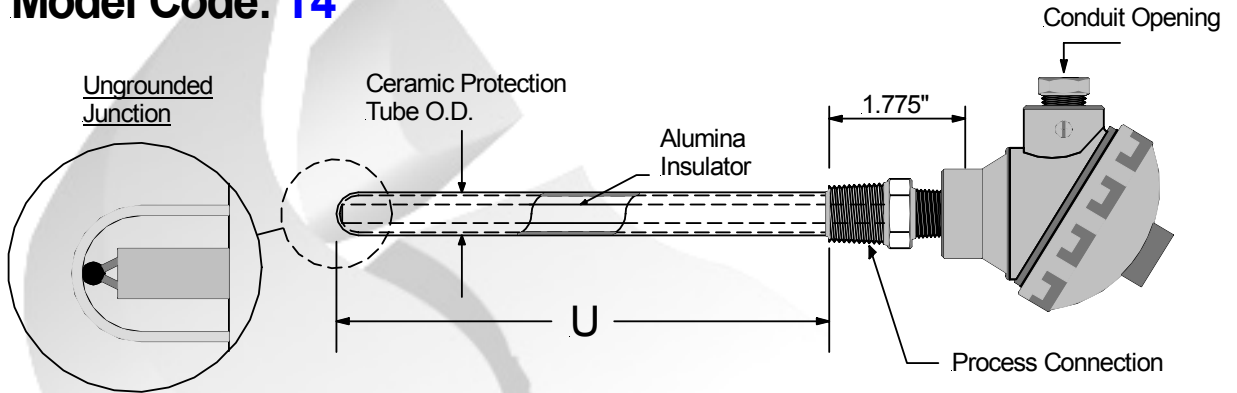

Model: **T4** A B C — D E F — G H I

A Ceramic Tube Size	
A	1/4" O.D.
B	3/8" O.D.
C	1/2" O.D.
D	11/16" O.D.
E	1" O.D.

B Protection Tube	
1	Alumina 1800C Max.
2	Mullite 1600C Max.

C "U" Dimension	
Specify "U" Length In Inches <u>06</u>	

Example "U" is 6" = 06

D Calibration			
Standard Limits of Error		Special Limits of Error	
A	S	D	S
B	R	E	R
C	B	F	B

E Wire Size		
Gage	Single	Dual
20	1	5
24	2	6
26	3	7
28	4	8

F Process Connection	
1	None
2	1/2" NPT
3	3/4" NPT
4	1" NPT

G Connection Head Model	
A	None, 3" Split Leads
B	Cast Aluminum: Standard
C	Cast Aluminum: Mini
D	Black Nylon Head
E	Cast Iron: Standard Size
F	316 Stainless Steel
G	Explosion Proof

H Conduit Opening	
1	None
2	1/2" NPT
3	3/4" NPT

I Connection Head Options	
N	None
B	No Terminal Block
T	4-20mA Transmitter